

PRODUCT  
DATASHEET



**SMFM2410 Series Surface Mount Fuses Devices**

## SMFM2410 Series Surface Mount Fuses Devices

### Description

Polytronics SMFM2410 series square shape surface mount medium inrush fuses adopt Wire-in-Air (WIR) construction. Small footprint with wide range of available current rating makes the fuse ideal for over-current protection applications, in both AC and DC circuits using surface mount technology. SMFM2410 series is also RoHS compliant and halogen-free to meet global environmental standard.

### Features





- Slow-blow, Inrush withstand capability
- Wire-In-Air performance
- Wide operating temperature rang
- Wide range of current rating available
- Higher temperature profiles
- Excellent environmental integrity





### Application

- LED lighting
- Battery packs
- Digital cameras
- Game equipment
- Medical device
- LCD monitors and modules
- PC related equipment / peripherals
- Power supply
- Wireless base station

### Agency Approval and Environmental Compliance

Agency	File Number	Regulation	Standard
	UL/CSA:E331807		2011/65/EU
	SU05049-15001A (1~2.5A) SU05049-15002A (3~5A)		IEC 61249-2-21:2003

### Electrical Characteristics

Part Number	Current Rating (A)	Voltage Rating	Interrupting Rating	Typical Cold DCR† (mΩ)	Nominal Melting I <sup>2</sup> T‡ (A <sup>2</sup> S)	Agency Approval	
							
SMFM2410P100	1	250V	1A-5A 50A / 250V AC 50A / 125V DC	130	1.54	✓	✓
SMFM2410P125	1.25			95	2.42	✓	✓
SMFM2410P150	1.5			82	3.03	✓	✓
SMFM2410P160	1.6			75	3.99	✓	✓
SMFM2410P200	2			65	4.86	✓	✓
SMFM2410P250	2.5			45	7.58	✓	✓
SMFM2410P300	3			32	10.62	✓	✓
SMFM2410P315	3.15			28	12.4	✓	✓
SMFM2410P350	3.5			26	16.17	✓	✓
SMFM2410P400	4			22	20	✓	✓
SMFM2410P500	5			18	27.5	✓	✓

† Measured at ≤10% rated current and 25°C

‡ Melting I<sup>2</sup>T at 10 times of rated current

## SMFM2410 Series Surface Mount Fuses Devices

### Electrical Specification

Ampere Rating	% of Current Rating	Opening Time
1A~5A	100%	4 Hours Min.
1A~5A	200%	120 Seconds Max.


### Physical Specifications

Materials	Substrate: Ceramic Terminations: Au Plated Brass Cap Element: Cu-Ag Alloy wire
Solderability	MIL-STD-202
Soldering Parameters	Wave Solder: 260°C, 10 seconds max. Reflow Solder: 260°C, 5 seconds max. Hand Solder: 300°C, 2 seconds max.

### Environmental Specifications


Operating Temperature	-55°C to 125 °C
-----------------------	-----------------

### Thermal Derating Curve

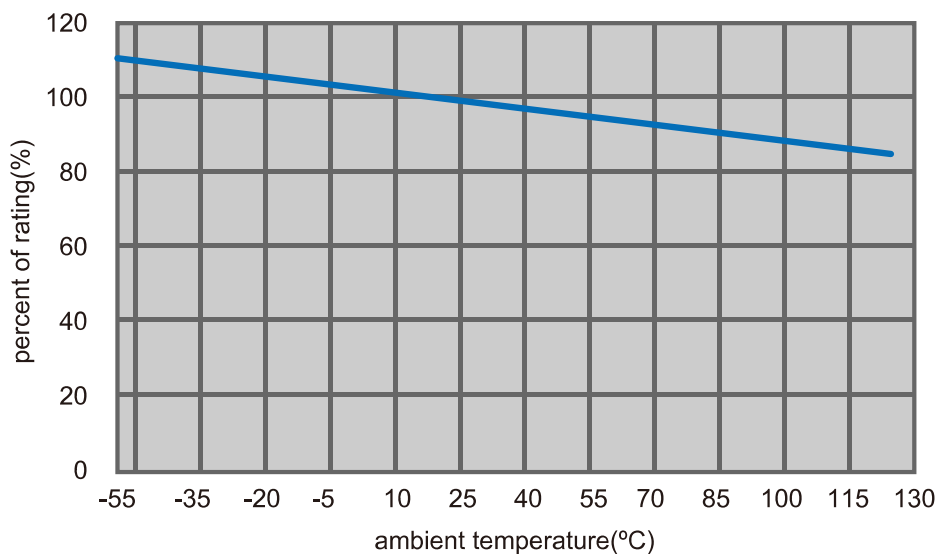


## SMFM2410 Series Surface Mount Fuses Devices

### Time-Current Curve

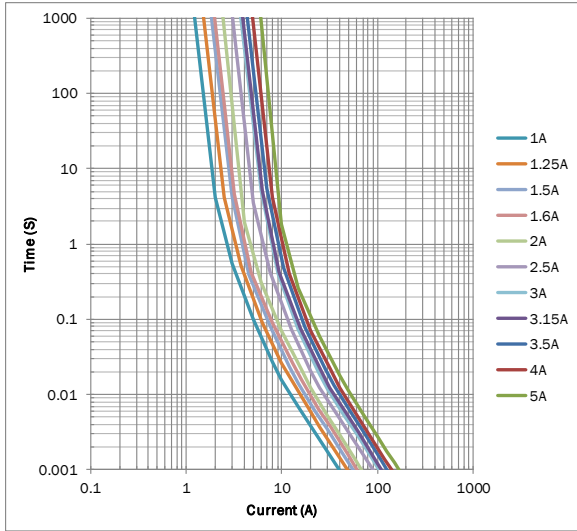

### I<sup>2</sup>T vs Time Curve

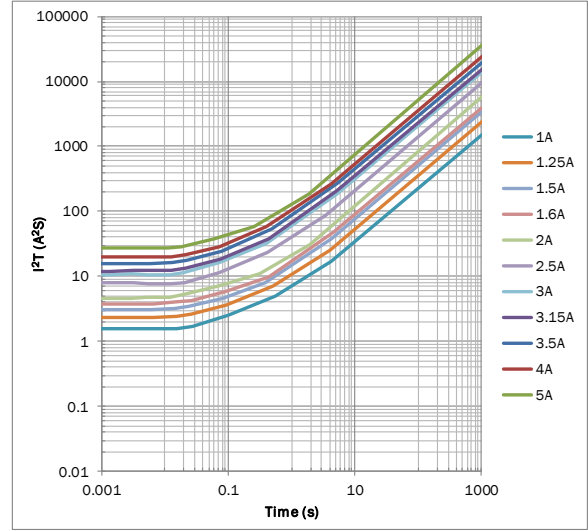


### Physical Dimensions (mm.)

#### Dimensions (mm)

L	W	T	D
6.10±0.20	2.5±0.10	2.5±0.10	1.4±0.10


#### Recommended Solder Pad Dimension (mm)

A	B	C	D
8.0±0.3	3.0±0.3	2.5±0.3	3.0±0.3

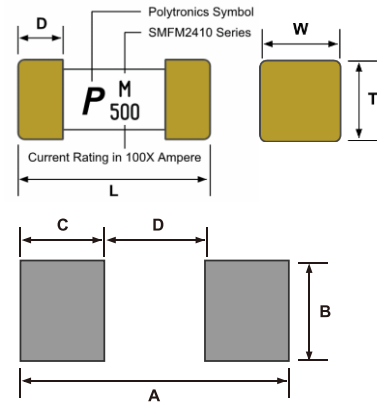

### Part Number

SMF M 2410 P □□□

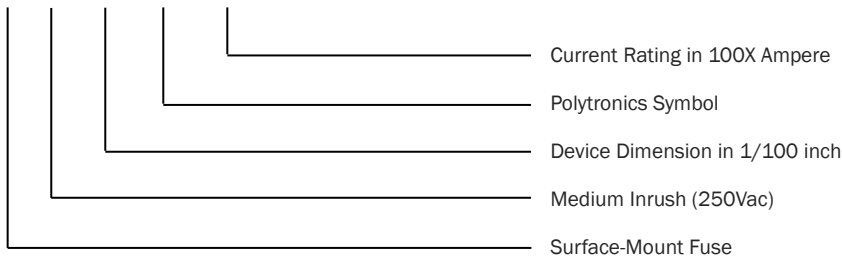


## SMFM2410 Series Surface Mount Fuses Devices

### Reliability Test

Characteristics	Test condition / Methods	Requirement	Test Reference
Time/Current	100% In	No Fusing; 4hours min.	UL248-14
	200% In	< 120 seconds	Refer to Spec
	1000% In	>10ms	IEC60127-4
Voltage Drop	100% In	1A ~ 5A < 300mv	IEC 60127-4
Endurance Test	Repeating 100 cycles of 1In for 1 h and switching off for 15min, following by 1 h at 1.25In and testing temperature rise	\Delta R : <10% <75°C	IEC 60127-4
Interrupting Ability	50A@250V AC/125V DC (1A~5A)	Without permanent arcing, ignition, and bursting of fuse link	UL 248-14 IEC60127-4
Solder ability	240°C ± 5°C, 3sec ± 0.5sec	95% coverage min	IEC 60127-4 IEC 60068-2-20 MIL-STD-202
Resistance to Soldering	260°C ± 5°C, 10sec ± 0.5sec	\Delta R : <15%	MIL-STD-202 Method210
High Temperature Operating Life	96 hours, 70°C ± 2°C at 0.6In.	\Delta R : <10%	MIL-STD-202 Method 108
Humidity (Steady State)	1000 hours at 40°C ± 2°C 90~95%RH	\Delta R : <10%	MIL-STD-202 Method 103
Low Temperature Storage	96 hours at -55°C ± 3°C.	\Delta R : <10%	IEC60068-2-1
High temperature Storage	96 hours at 125°C ± 2°C	\Delta R : <10%	IEC60068-2-2
Salt Spray	5% salt solution, 48 hours exposure	\Delta R : <10%	MIL-STD-202 Method 101
Thermal Shock	100 cycles between -65°C /+125°C 60 minutes at each extreme zone	\Delta R I: <(10%R+0.005\Omega)	IEC 60068-2-14

## SMFM2410 Series Surface Mount Fuses Devices

### Soldering Parameters

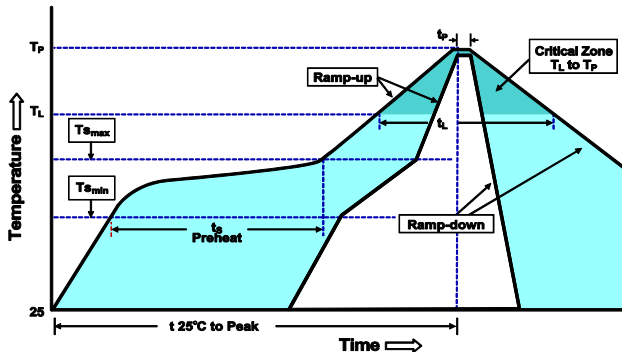

Average Ramp-Up Rate ( $T_{s_{max}}$ to $T_P$ )	3°C/second max.
Preheat	
-Temperature Min ( $T_{s_{min}}$ )	150°C
-Temperature Max ( $T_{s_{max}}$ )	200°C
-Time ( $T_{s_{min}}$ to $T_{s_{max}}$ )	60-120 seconds
Time maintained above:	
-Temperature ( $T_L$ )	217°C
-Time ( $t_L$ )	20-40 seconds
Peak Temperature ( $T_P$ )	260°C
Time within 5°C of actual Peak Temperature ( $t_P$ )	5 seconds
Ramp-Down Rate	6°C /second max.
Time 25°C to Peak Temperature	8 minutes max.


Note 1: All temperature refer to topside of the package, measured on the package body surface.

Note 2: If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.


### Packaging Quantity

Part Number	Tape & Reel Quantity
SMFM2410PXXX	1000

### Tape & Reel Specification (mm.)

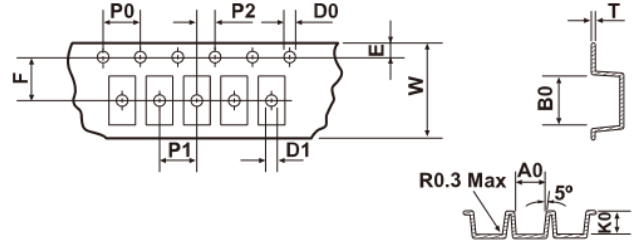

A0	2.70 ± 0.10	E	1.75 ± 0.10
B0	6.40 ± 0.10	F	5.50 ± 0.10
K0	2.70 ± 0.10	D0	∅ 1.50 ± 0.10
P0	4.00 ± 0.10	D1	1.50 ± 0.25
P1	4.00 ± 0.10	W	12.0 ± 0.15
P2	2.00 ± 0.10	T	0.25 ± 0.05

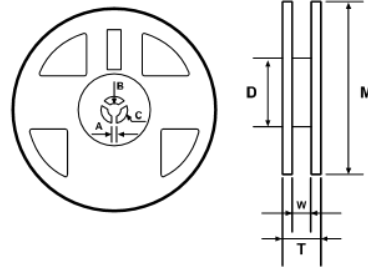

M	∅ 178.0 ± 2.0
W	12.5 ± 1.0
T	14.5 ± 1.5
A	2.0 ± 0.5
B	∅ 13.0 ± 0.5
C	∅ 21.0 ± 0.5
D	∅ 58.0 ± 2.0