


PMV0805 Series MOV Devices

Features

- Wide operating voltages ranging from 1.4 Vrms to 35 Vrms (2.0 Vdc to 45 Vdc).
- Fast response, instantly clamping the transient over voltage.
- High surge current handling capability.
- High energy absorption capability.
- Low clamping voltages, providing better surge protection.
- Low capacitance values, providing digital switching circuitry protection.
- High insulation resistance, preventing electric arcing to the adjacent devices or circuits.

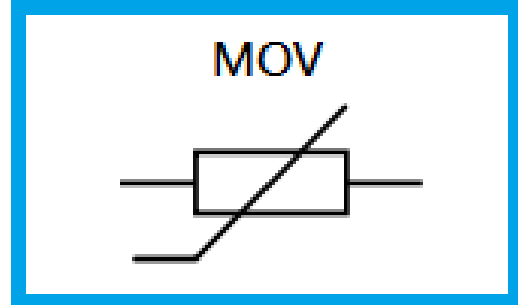

Applications

- Universal Serial Bus (USB).
- Mobile communication.
- Computer/DSP product.
- Video and audio ports.
- Portable/Hand-Held Products.
- Data, Diagnostic I/O ports.

General Characteristics Definition


- Operating temperature: -40 ~ 125°C
- Storage temperature: -40 ~ 125°C

Material



- Electrode: Ag/Ni/Sn
- Chip body: Zinc oxide

Part Number Code

PMV 0805 - □□□ □

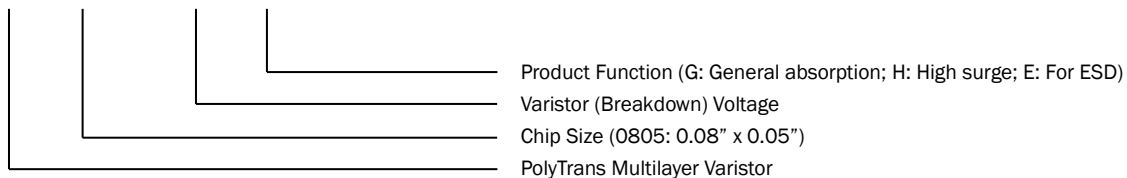

Physical Dimensions

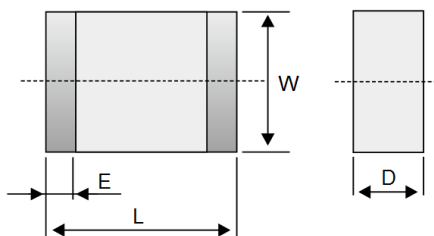

Symbol	Dimension (mm)
L	2.0±0.2
W	1.2±0.2
D	1.0 max.
E	0.3±0.2
A	3.0 typ.
B	1.2 typ.
C	0.9 typ.

Note:


1. All dimensions are in millimeters.
2. No marking on the device.

PMV0805 Series MOV Devices

Electrical Characteristics

Part Number	Max Allowable Voltage		Varistor Voltage $V_b @ 1 \text{ mA}$	Energy 10/1000 μs	Withstand Surge Current I_{PP} 8/20 μs	Max Clamping Voltage V_c		Typical Capacitance (pF)	Safety Certification UL/CSA
	V_{RMS}	V_{DC}				V	I		
	(V)	(V)	(V)	(J)	(A)	(V)	(A)	(pF)	UL/CSA
PMV0805-3R0G	1.4	2.0	3	0.2	60	9	2	1200	-
PMV0805-5R0G	2.4	3.3	5	0.2	80	12	2	900	-
PMV0805-8R0G	4.0	5.5	8	0.2	80	18	2	1100	-
PMV0805-120G	7.0	9.0	12	0.2	100	24	2	1000	-
PMV0805-180G	11	14	18	0.2	100	30	2	450	-
PMV0805-220G	12	16	22	0.2	100	36	2	850	-
PMV0805-240G	14	18	24	0.2	100	38	2	500	-
PMV0805-270G	17	22	27	0.2	100	44	2	350	-
PMV0805-300G	19	24	30	0.2	100	48	2	350	-
PMV0805-330G	20	26	33	0.2	100	54	2	300	-
PMV0805-360G	22	28	36	0.2	100	59	2	350	-
PMV0805-390G	25	30	39	0.2	100	65	2	350	-
PMV0805-420G	26	33	42	0.2	80	72	2	350	-
PMV0805-470G	30	38	47	0.2	80	77	2	280	-
PMV0805-560G	35	45	56	0.2	80	90	2	500	-


Peak Pulse Current Test Waveform

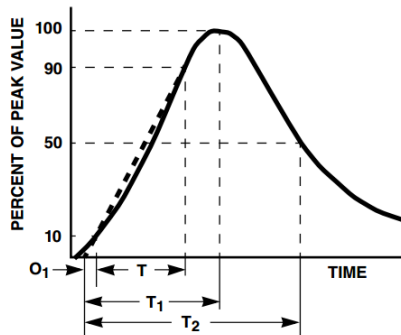

O_1 = Virtual Origin of Wave
 T = Time from 10% to 90% of Peak
 T_1 = Rise Time = $1.25 \times T$
 T_2 = Decay Time

Example - For an 8/20 ms current waveform
 $8 \mu\text{s} = T_1 = \text{Rise Time}$
 $20 \mu\text{s} = T_2 = \text{Decay Time}$


Power Derating Curve

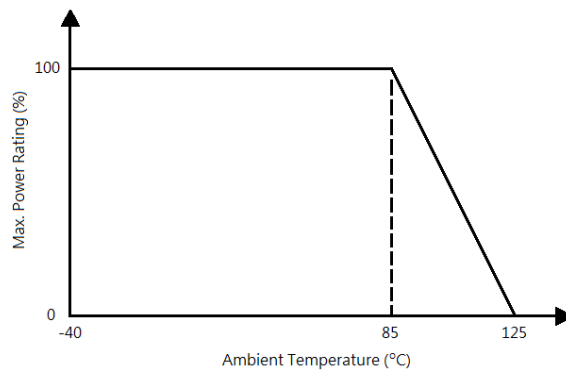

PMV0805 Series MOV Devices

Lead Free Reflow Soldering Recommendations

Preheat	
- Temperature Min (T_{s_min})	150°C
- Temperature Max (T_{s_max})	200°C
- Time (T_{s_min} to T_{s_max})	60-180 seconds
- Average Ramp-Up Rate	1~3°C/second
Peak Temperature	260°C max.
Time within 5°C of actual Peak Temperature (t_p)	40 seconds max.
Ramp-Down Rate	6 °C /second max.

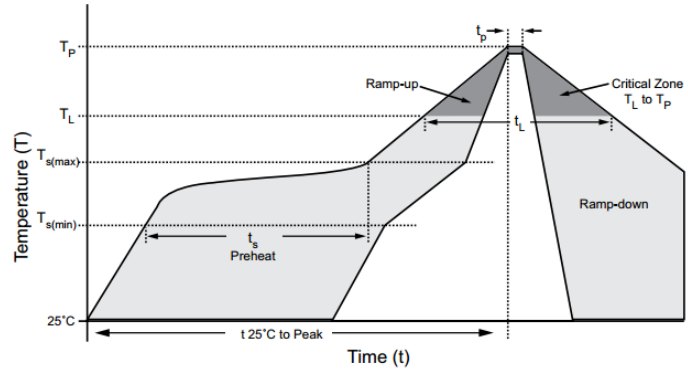

Note: If the wave soldering temperatures exceed the recommended profile, devices may not meet the performance requirements.


Reliability Test

Environmental Ratings										
Test Parameter	Test Condition / Description	Performance Requirements								
Dry Heat Loading	The specimen shall be applied continuously the maximum allowable voltage at the specified conditions for specified period and then stored at room temperature and normal humidity over 2 hours. Thereafter, the change of V_b and mechanical damage shall be examined. Ambient temp: 85±2°C / Period: 1000±24hours	$\Delta V_b/V_b \leq 10\%$								
High Temp Storage	In a dry oven without load. Ambient temp: 125±2°C / Period: 1000±24hours	$\Delta V_b/V_b \leq 10\%$								
Damp Heat/ Humidity Loading	The specimen shall be applied continuously the maximum allowable voltage at the specified conditions for specified period and then stored at room temperature and normal humidity over 2 hours. Thereafter, the change of V_b and mechanical damage shall be examined. Ambient temp: 40±2°C, 90~95%RH / Period: 1000±24hours	$\Delta V_b/V_b \leq 10\%$								
Temperature Cycle	Condition the specimen to each temperature from step 1 to step 4 in this order for the period shown in the table of specifications. The change of V_b and mechanical damage shall be examined after 2 hours. <table border="1" style="margin-left: 20px;"> <tr> <td>Step 1</td> <td>-40±3°C / 30min.</td> </tr> <tr> <td>Step 2</td> <td>Room temp / 15min.</td> </tr> <tr> <td>Step 3</td> <td>85±2°C / 30min.</td> </tr> <tr> <td>Step 4</td> <td>Room temp / 15min.</td> </tr> </table>	Step 1	-40±3°C / 30min.	Step 2	Room temp / 15min.	Step 3	85±2°C / 30min.	Step 4	Room temp / 15min.	No Visible damage $\Delta V_b/V_b \leq 10\%$
Step 1	-40±3°C / 30min.									
Step 2	Room temp / 15min.									
Step 3	85±2°C / 30min.									
Step 4	Room temp / 15min.									
Low Temp Storage	In a cooling chamber without load. Ambient temp: -40±2°C / Period: 1000±24hours	$\Delta V_b/V_b \leq 10\%$								

PMV0805 Series MOV Devices

Packaging Information

Part Number	Carrier Material	Quantity (EA/Roll)	Reel Dimension (mm)	
			Diameter	Thickness
PMV0805 Series	Paper	4000	178.0±1.0 (7" Paper Reel)	9.0±0.5

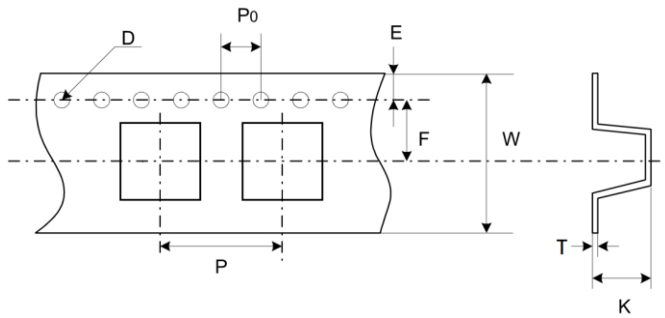

Symbol	Dimension (mm)
P	4.0±0.1
P0	4.0±0.1
D	1.55±0.05
E	1.75±0.1
F	3.5±0.1
W	8.0±0.2
T	0.22±0.05
K	1.3±0.1